



# PP Rope

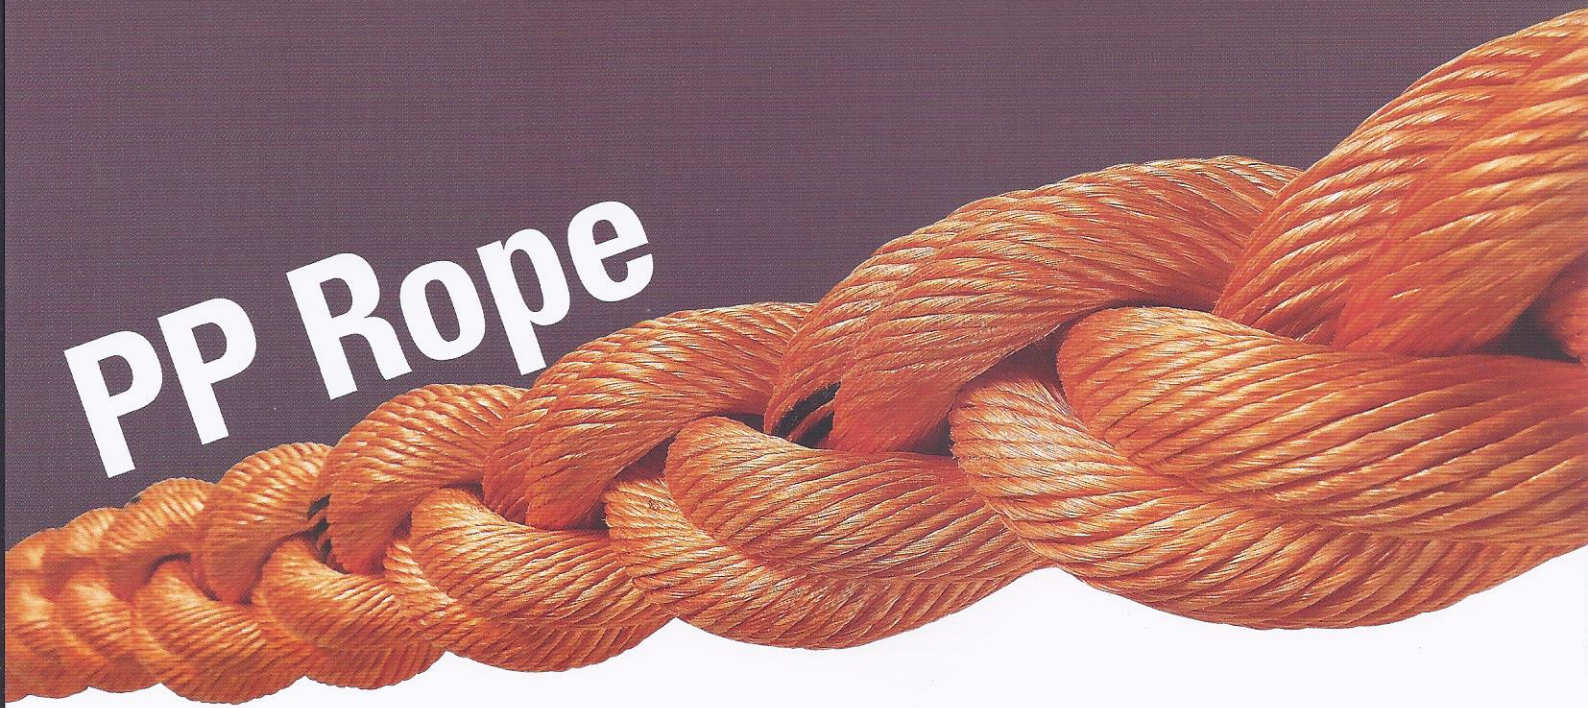

## Structure



8-STRAND CONSTRUCTION

## Fiber Content

- Polypropylene Fiber

## Characteristics

- Good strength
- Floats
- Superior ultraviolet resistance
- Excellent flex wear resistance
- Non-Torque construction

## Applications

- Floating tow lines
- Mooring and tie-up lines
- Mooring pick-up lines

Dia		Cir	Weight		MBL	
inch	mm	inch	200m/kg	600ft/lb	ton	kN
15/16	24	3	55	111	8.00	78.50
1-1/32	26	3-1/4	64	129	9.20	90.30
1-1/8	28	3-1/2	74	149	10.60	104.00
1-3/16	30	3-3/4	86	173	12.00	117.80
1-1/4	32	4	97	196	13.50	132.50
1-11/32	34	4-1/4	110	222	15.10	148.20
1-7/16	36	4-1/2	122	246	17.00	166.90
1-1/2	38	4-3/4	135	272	19.00	186.50
1-9/16	40	5	143	288	23.50	230.70
1-11/16	42	5-1/4	161	325	26.00	255.30
1-25/32	45	5-5/8	184	371	29.50	289.60
1-7/8	48	6	208	419	33.00	324.00
2	50	6-1/4	226	456	36.00	353.40
2-1/16	52	6-1/2	244	492	38.00	373.10
2-5/32	55	6-7/8	274	552	43.00	422.20
2-3/8	60	7-1/2	326	657	51.00	500.00
2-9/16	65	8-1/8	370	746	57.00	559.70
2-3/4	70	8-3/4	440	887	68.00	667.70
2-7/8	72	9	460	927	72.00	706.90
2-31/32	75	9-3/8	508	1,024	79.00	775.70
3-5/32	80	10	580	1,169	88.00	864.10
3-3/8	85	10-5/8	655	1,320	98.00	962.30
3-9/16	90	11-1/4	734	1,480	110.00	1,080.10
3-3/4	95	11-7/8	817	1,647	123.00	1,207.70
4	100	12-1/2	905	1,824	135.00	1,325.60
4-3/20	105	13-1/8	998	2,012	150.00	1,472.90
4-5/16	110	13-3/4	1,095	2,207	165.00	1,620.20
4-9/16	115	14-3/8	1,197	2,413	180.00	1,767.40
4-3/4	120	15	1,300	2,621	195.00	1,914.70

